

# IBC Adaptor Identification


Starting Outlet:



**NW50 Male**  
(DIN61, 61mm OD coarse thread)

**Caps for NW50 Thread:**  
Plain 500743  
 $\frac{3}{8}$ " BSP insert for tap 5007455  
3 Piece for Nozzle 500746

Convert To:

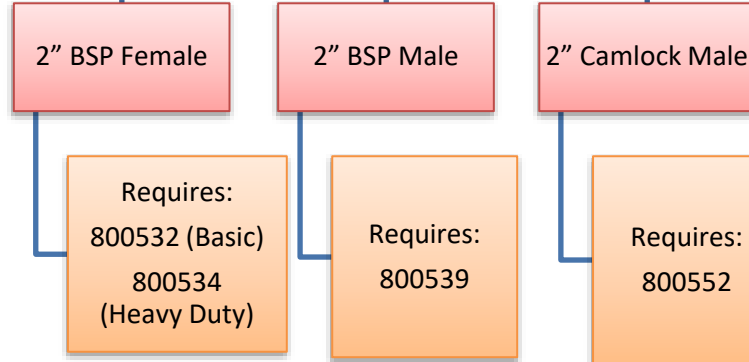


Starting Outlet:



**2" BSP Male**  
(2" fine thread)

**Caps for 2" BSP Thread:**  
Plain 500742  
3 Piece for Nozzle 500768

Convert To:

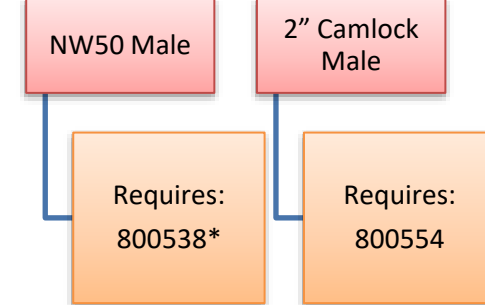


Starting Outlet:



**2" Camlock Male or Schutz Integrated Camlock\***

**Caps for 2" Male Camlock:**  
57mm 500747  
61mm 500478

Convert To:

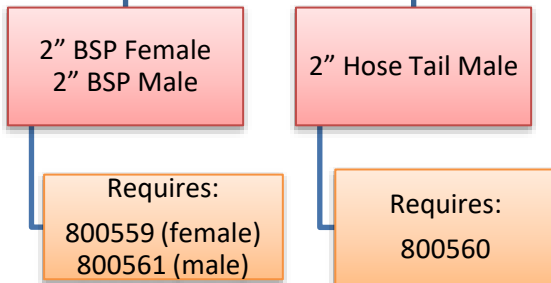


Starting Outlet:



**S100 Buttress Male**  
(100mm OD coarse thread)

**Caps for S100 Thread:**  
Plain 500751

Convert To:

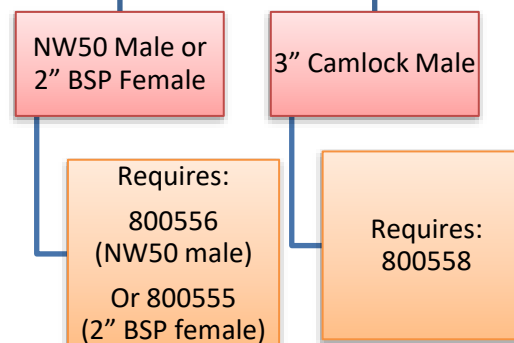


Starting Outlet:



**80mm fine Kingtainer**

Convert To:

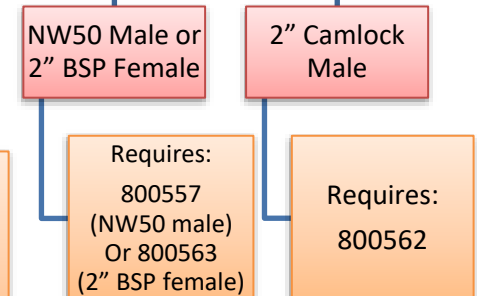

\* Integrated camlock valves have camlock outlet with a shallow (1cm deep) fine male thread which may be 57 or 61-62mm. Screw-on adaptors cannot be fitted. Use camlock adaptors with locking arms.